°120 °50+-°20- IP65 220/240V 50/60Hz 3000K - 4000K 6500K ≥80

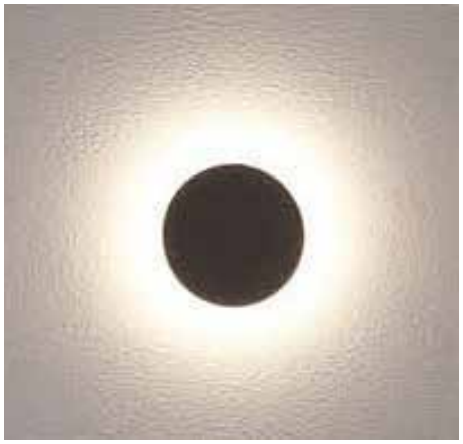



OWLW120000

TRIDONIC OSRAM CREE PHILIPS

Code	Wattage	Flux	Dimensions	P.F	CRI	Voltage	Life time
OWLW120A06	6 w	720 lm	φ150xD50 mm	0.9	>80	100-265VAC	50000 hr
OWLW120B06	6 w	720 lm	W150xL150xD150 mm				

Upon request

Dim 10/30% 100% K 5000/2700 CRI ≥90 DALI

Applications

RESEDINTIAL OFFICES RESTAURANTS HOTELS